


ID BOX - ID1 OEM series

e-Document verification without movement

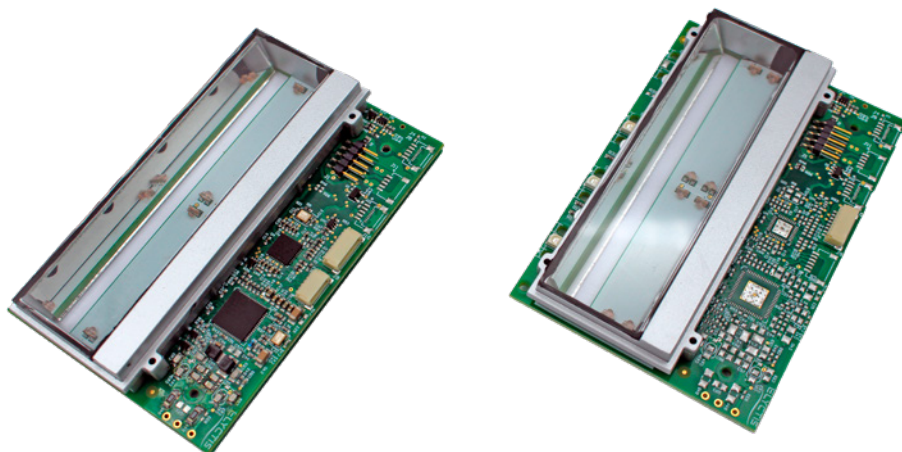

- Dedicated to identity documents
- Scans MRZ and reads RFID chip without movement
- Support ICAO & national eID standards
- Fast reading
- Support all operating systems
- USB powered
- Automatic detection

Features

General

- Dimensions 90 x 60 x 14 mm
- Temperature In operation: 0°C to +50°C
Storage: -40°C to +80°C
- Communication USB 2.0 full speed (12 Mbps)
- Host operating systems Windows, MacOS, Linux, Android

MRZ scanner

- MRZ Lines 1 line: IDL, CAN, ...
3 lines: eID
- Font Type OCR B as per ICAO 9303

Contactless reader

- Supported protocols ISO 14443 Part 1 to 4, type A/B – T=CL and Mifare
All Mifare products: Ultralight, 1K, 4K, Plus, DESFire EV1, Smart MX,...
- NFC support Card Reader/Writer mode
- Speed Baudrate up to 848 kbps
- Communication Custom CCID library (Android)
CCID compliant (Windows, MacOS, Linux)
PC/SC 2.01 compliant (Windows, MacOS, Linux)
- Firmware Support for RF configuration
Pass-through command to reach protocol lower layer
Field upgradable

Contact card reader

- Supported protocols ISO 7816 – T=0 and T=1
5V, 3V, 1.8V, ISO 7816 Class A/B/C
- Speed Baudrate up to 230 kbps
Clock: Up to 10 Mhz
- Communication Custom CCID library (Android)
CCID compliant (Windows, MacOS, Linux)
PC/SC 2.01 compliant (Windows, MacOS, Linux)

Product Range

	ID BOX 511	ID BOX 521	ID BOX 531
MRZ scanner	✓	✓	✓
Contactless reader		✓	✓
Contact reader			✓



ELYCTIS sas

91 rue Benjamin Franklin – 84120 Pertuis – FRANCE

Tél. +33 6 27 71 37 68

contact@elyctis.com - www.elyctis.com

Siret 508 994 449 00033 – VAT number FR47 508 994 449

ELYCTIS HK Limited

D2 2/F Mai Wah Ind. Bldg. – 1-7 Wah Sing St. Kwai Chung NT

HONG KONG

Tél. +852 91 08 78 58

contact_hongkong@elyctis.com